

CP-UNC-BG121C-VM

12MP AI IR Network Box Camera

- 1/1.7" 12MP PS CMOS Image Sensor (1.494cm)
- Max. outputs 12MP(4000 × 3000)@25/30fps
- Instastream/H.265/Smart H.264+/H.264 coding
- Five streams for three-channel HD video
- DWDR, Day/Night (ICR), 3D-DNR, Defog, ROI, AWB, AGC, BLC, HLC
- C/CS Mount lens
- Support Built-in Mic, Micro SD Card, ePoE, PoE
- Perimeter Protection, Face Detection, Video Metadata, ANPR, People Counting, Queue Management
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



System Overview

Understanding the need of the hour in the security and surveillance industry, this series has been integrated with the starlight technology along with efficient and powerful deep-learning algorithms to make your life hugely easier. The numerous AI-based smart functions of this camera let you capture a face, protect the perimeter and even count people, greatly improving the accuracy of your video analysis. This camera also complies with international certification standards such as IP67 and IK10, as this camera is not just dust-proof and water-proof but also shock-proof and vandal-proof (which is given in selected models).

Functions

Face Detection

With the help of the deep learning algorithm that is used in this technology, people can easily be detected, tracked, recorded, and captured. It takes only a second to detect one human face. Face detection is useful in cameras to help with auto-focus. This technology is mainly used to identify the presence of a human face.



CP-UNC-BG121C-VM

12MP AI IR Network Box Camera

Functions

Smart Analytical Support

Using an advanced algorithm, smart analytical technology lets you set a multitude of safety parameters and sends you alerts when any of those parameters have been compromised. Not just when there's an occurrence of tripwire or intrusion, but also in the cases of missing or abandoned objects.

ANPR Technology

The automatic number plate recognition technology is being widely used these days as this enables accurate, automatic reading of every vehicle's number plate that is crossing a border or an entrance and then automatically runs that number through the system to detect if the vehicle should be allowed to enter or not.

Instastream

This camera has been designed with the latest and most efficient innovation among the standard video compression designs. Smart encoding algorithms developed by CP PLUS help in saving up to 70% more bandwidth than H.265 along with making it more beneficial for minimizing bandwidth and storage costs. It enhances video coding efficiency while providing high resolution and the rate of frame in the video using Intelligent Region Perception to detect motion in each frame.

Face Recognition

This technology can be used to extract faces from a range of cameras and is capable of processing large quantities of faces in real-time or post-event and can provide alerts to help with access and authentication, border security, and crowd control.

gCMOB/ iCMOB

Designed to allow users to access and control live streaming from CP PLUS IP Cameras, DVRs/ NVRs and Video Door Phones, the CP PLUS gCMOB/ iCMOB application offers a host of features such as Easy GUI, up to 16 live viewing split-ups; InstaOn cloud support; Playback; digital zoom ins; two-way talk, and more.

KVMS Pro

The KVMS Pro is a hybrid security management software that allows the management of various surveillance devices such as cameras, DVRs/ NVRs, encoders/ decoders, etc. It is released with the surveillance hardware and exclusively supports CP PLUS devices.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-UNC-BG121C-VM

12MP AI IR Network Box Camera


Feature	Specification
Image Sensor	1/1.7"12Megapixel progressive CMOS (1.494cm)
Effective Pixels	4000 (H) × 3000 (V)
RAM	2GB
ROM	4GB
Minimum Illumination	0.01 Lux@F1.8 (Color,30IRE) 0.001 Lux@F1.8 (B/W,30IRE)
Shutter Speed	Auto/Manual, 1/3~1/100000s
White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
Lens	C/CS
Gain Control (AGC)	Auto/Manual
S/N Ratio	>56dB
Bit Rate Control	CBR/VBR
ROI	Yes (4 areas)
Video Compression	H.265, Smart H.264+, H.264, H.264H, H.264B, MJPEG (only supported by sub stream)
Encode Strategy	Instastream
ICR	Auto (ICR)/Color/B/W
Video Streaming	Main stream: 4000 × 3000 @1-25/30fps; Sub stream: 704 × 576@1-25fps, 704 × 480@1-30fps Third stream: 1920 × 1080 @1-25/30fps; Fourth stream: 1920 × 1080 @1-25/30fps Fifth stream: 704 × 576 @1-25fps; 704 × 480 @1-30fps
Resolution	12MP (4000 × 3000); 8MP (3840 × 2160); 6MP (3072 × 2048); 5MP (3072 × 1728); 5MP (2592 × 1944); 4MP (2688 × 1520); 3MP (2048 × 1536); 3MP (2304 × 1296); 2MP (1920 × 1080); 1.3MP (1280 × 960); 720P (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240); VGA (640 × 480)
Back Light Compensation	BLC/ HLC/ DWDR
Motion detection	OFF/ON (4 areas, rectangular)
Privacy Mask	8 areas

Feature	Specification
Defog	Yes
Stream Capability	5 streams
Noise Reduction	3D-DNR
Built-in Mic	Support
Audio Input	2 channels (3.5mm JACK port)
Audio Output	1 channel (3.5mm JACK port)
Audio Compression	G.711a; G.711Mu; G726; G.723
Alarm IN	2 channel In: 5mA 3V–5V DC
Alarm Out	2 channel Out: 1000mA 30V DC/500mA 50V AC
Face Detection	Face detection; track; optimization; snapshot; face enhancement; face exposure; face attribute extract, 6 attributes and 8 expressions: Gender, age, glasses, expressions (anger, calm, happiness, sadness, disgust, surprise, confusion and fear), mask, beard; face matting setting: face, single inch photo; three snapshot methods: real-time snapshot, optimization snapshot, quality priority; face angle filter; optimization time setting; Support Duration Optimal, Non-living Filtering
People Counting	Support tripwire number counting, people counting in area, and displaying and outputting yearly/monthly/daily reports. Support queue management, and displaying and outputting monthly/daily reports. Support 4 tripwire rules configuration, people counting in 4 areas, and 4 queue management functions.
ANPR	ANPR, track, priority, snapshot Vehicle attributes: license plate, vehicle type, vehicle color, vehicle brand Other attributes: Seat belt, smoking, phoning
Video Metadata	Supports human body, human face, motor vehicle and non-motor vehicle image capture, attributes extraction, counting targets by directions (A>B, B>A, or A< >B), and exporting the report.
Alarm Event	No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; fast moving; abandoned object; missing object; loitering detection; people gathering; parking detection; scene changing; audio detection; defocus detection; external alarm; face detection; people counting in area; stay alarm; people counting; people counting exception detection; safety exception; queue management; face & body detection; face & body detection (match attributes alarm); face & body detection (mismatch attributes alarm); face recognition
Mirror	Yes

Feature	Specification
Face and Body Detection	<p>There are two modes: General mode and PPE Detection.</p> <p>General mode: Supports enabling face detection and human detection at the same time, and alarms can be triggered.</p> <p>PPE Detection: Supports PPE detection, can detect attributes including face mask, safety helmet, glasses, and safety vest, top color and bottom color, and determine whether PPE requirements are met. Alarms can be triggered according to the alarm settings.</p>
Face Recognition	<p>There are two models: General mode and counting mode.</p> <p>General mode: Face detection; track; snapshot; snapshot optimization; face enhancement; face exposure; face attribute extraction including 6 attributes (gender, age, glasses, expressions, mask and beard) and 8 expressions (anger, calm, happiness, sadness, disgust, surprise, confusion and fear); supports up to 5 face databases with 50,000 face pictures in total; supports non-living filtering</p> <p>Counting mode: Offers advanced customer counter, filtering of specified face database, and exporting of reports before and after removing duplicate faces.</p>
Protocol	<p>IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; 802.1x; SNMP; Bonjour; ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; InstaOn; RTMP</p>
Bit Rate	H.264: 32 kbps–16384 kbps ; H.265: 32 kbps–14080 kbps
Smart Detection	Abandoned object, moving object
Perimeter Protection	Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.
Intelligent Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos.
Ethernet	RJ-45 (10/100/1000 Base-T)
User/Host	20 (Total bandwidth: 240M)
Interface Ports	1 RS-485 (baud rate range: 1200 bps-115200 bps)
Smart Phone	iPhone, iPad, Android Phone
Micro SD	FTP; Micro SD card (256 GB); NAS; SFTP
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)
SDK and API	Yes
Cyber Security	<p>Video encryption; firmware encryption; configuration encryption; Digest; WSSE; account lock-out; security logs; IP/MAC filtering; generation and importing of X.509 certification; syslog; HTTPS; 802.1x; trusted boot; trusted execution; trusted upgrade</p>

Feature	Specification
Operating Temperature	-30°C to +60°C (-22°F to +140°F), /Less than 95% RH
Storage Temperature	-30°C to +60°C (-22°F to +140°F)
Power Source	12V DC/24V AC/PoE(802.3at), ePoE, max. current 165mA
Power Consumption	Basic power consumption: 5.3W (12V DC); 5.1W (24V AC active power); 5.1W (PoE) Max. power consumption: 12.7W (12V DC); 12.2W(24V AC active power); 12.6W (PoE)
Browser	IE: IE9 and later, Chrome: Chrome 42 and later, Firefox: Firefox 48.0.2 and later
Dimension	86 mm × 74 mm × 150 mm (3.39" ×2.91" ×5.91") (L × W × H)
Casing	Metal
Weight	780g

Dimensions (mm/inch)

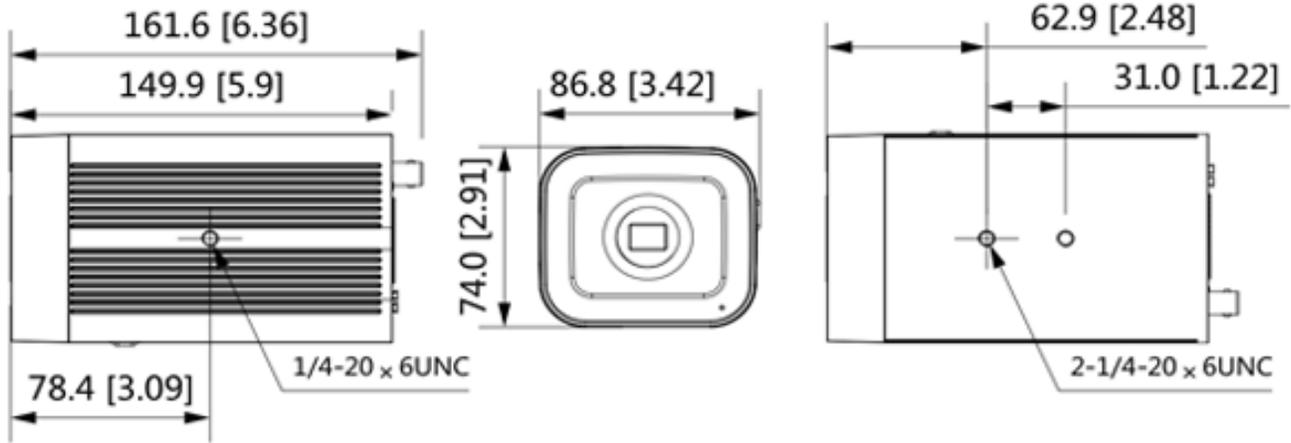

Company Name:

CP PLUS (Aditya Infotech Ltd.)
F-28 Okhla Industrial Area, Phase 1,
New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com