


**CP- UNC-DD61 L5CE-MD****6MP Full HD WDR IR Network Dome Camera - 50Mtr.****Main Features**

- 1/2.9" 6MP PS CMOS Image Sensor
- 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- H.265 and H.264 Triple - stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (3.6mm optional)
- IR Range of 50 Mtrs, IP67, SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

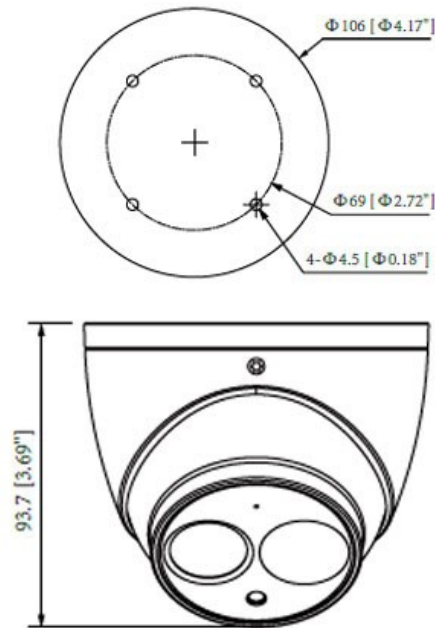

# CP- UNC-DD61L5CE-MD

6MP Full HD WDR IR Network Dome Camera - 50Mtr.



## Feature

Image Sensor  
 Minimum Illumination  
 Effective Pixels  
 Shutter Speed  
 White Balance  
 Lens  
 Gain Control (AGC)  
 Angle of View  
 Video Compression  
 S/N Ratio  
 Back Light Compensation  
 Video Streaming  
 Resolution  
 Digital Zoom  
 Motion detection  
 Privacy Mask  
 ICR  
 ROI  
 Audio Compression  
 Protocol  
 Smart Detection  
 Ethernet  
 User Account  
 IR  
 Smart Phone  
 Micro SD  
 Audio

## Specification

1/2.9" 6Megapixel progressive scan CMOS  
 0.04Lux/F1.6( Color,1/3s,30IRE), 0.4Lux/F1.6( Color,1/30s,30IRE), 0Lux/F1.6(IR on)  
 3072(H) x 2048(V)  
 Auto/Manual, 1/3(4)~1/100000s  
 Auto/Natural/Street Lamp/Outdoor/Manual  
 2.8mm (3.6mm optional)  
 Auto/Manual  
 H: 98° (69°), V: 67° (48°)  
 H.265+/H.265/H.264+/H.264  
 More than 50dB  
 BLC / HLC / WDR(120dB)  
 Main Stream: 6MP (1~20fps), 4MP(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 1080P(1~25/30fps)  
 (3072×2048)/(3072×1728)/(2592×1944)/(2688×1520)/(2560×1440)/(2304×1296)/1080P  
 (1920×1080)/SXGA(1280×1024)/1.3M(1280× 960)/720P(1280×720)/D1(704×576/704×480)/  
 CIF(352×288/352×240)  
 16x  
 Off / On (4 Zone, Rectangle)  
 Off / On (4 Area, Rectangle)  
 Auto (ICR)/Color/B/W  
 Off / On (4 Zone)  
 G.711a/ G.711Mu/ AAC/ G.726  
 HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS;  
 UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP;IGMP; SNMP,ONVIF, PSIA, CGI  
 Tripwire, Intrusion, Object Abandoned/Missing, Face Detection  
 RJ-45 (10/100Base-T)  
 20 Users  
 IR Range of 50 Mtr.  
 IOS, Android  
 Micro SD, Max 128GB  
 Built-in Mic



**CP- UNC-DD61L5CE-MD****6MP Full HD WDR IR Network Dome Camera - 50Mtr.****Feature**

Operating Temperature  
Power Source  
Power Consumption  
Weatherproof Standard  
Dimension  
Weight

**Specification**

-30°C~+60°C, Less than 95% RH  
DC12V, ePoE  
<6W  
IP67  
Φ106mm x 93.7mm  
0.47 Kg