


CP- UNC-TA30L5S-VM**3MP Full HD IR Network Bullet Camera - 50Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 25fps@3MP, 25/30fps@1080P
- H.264, H.264H, H.264B , MJPEG dual-codec encoding
- DWDR, Day/Night (ICR), 3DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm fixed lens (6mm optional)
- IR Range of 50 Mtrs, IP67, SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

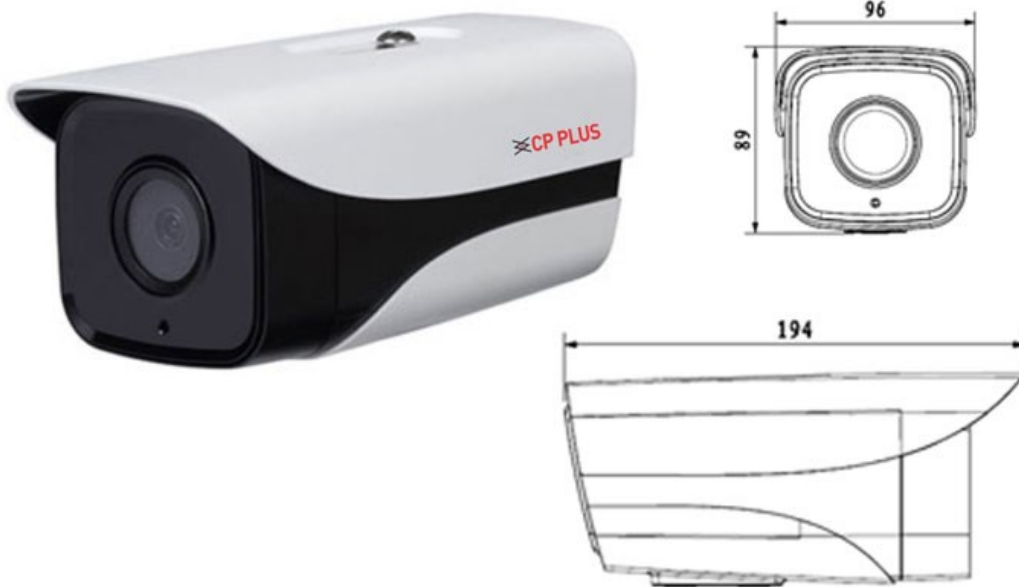

CP- UNC-TA30L5S-VM

3MP Full HD IR Network Bullet Camera - 50Mtr.

Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Lens
Angle of View
Gain Control (AGC)
Video Compression
S/N Ratio
Back Light Compensation
Video Streaming
Resolution
Motion detection
Privacy Mask
ICR
Audio Input
Audio Output
Audio Compression
Alarm IN
Alarm Out
Bit Rate
Protocol
Ethernet
User Account
IR
Smart Phone
Operating Temperature
Power Source

Specification

1/3" 3MP Progressive scan CMOS
1.1Lux/F2.0(Color); 0.25Lux/F2.0(Black&White); 0Lux/F2.0(IR on)
2048(H) x 1563(V)
Auto/Manual, 1/3s~1/100000s
Auto/Manual
3.6mm lens (6mm optional)
77° H, 41° V
Auto/Manual
H.264/H.264H/H.264B/MJPEG
More than 50dB
BLC/ HLC/ DWDR
Main Stream: 3MP(1 ~ 25fps)/1080P(1 ~ 25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3MP(2048×1536)/1080P(1920×1080)/720P(1280×720)/ D1(704×576/704×480) /CIF
(352×288/352×240)
Supports
Up to 4 areas
Auto (ICR)/Color/B/W
1 Ch.
1 Ch.
G.711a; G.711Mu
2 Ch.
2 Ch.
H.264: 5K~8Mbps
HTTP; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;
NTP; ONVIF; CGI
RJ-45 (10/100Base-T)
20 Users
IR Range of 50 Mtr.
iPhone, iPad, Android Phone
-30°C~+60°C , Less than 95%RH
DC12V (±30%) , PoE (802.3af)

CP- UNC-TA30L5S-VM**3MP Full HD IR Network Bullet Camera - 50Mtr.****Feature**

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

Max 5.8W

IP67

194mm x 96mm x 89mm

0.64Kg