


CP- UNC-TD4K081L4E-MD**4K Full HD WDR IR Network Bullet Camera - 40Mtr.****Main Features**

- 1/2.5" 8MP PS CMOS Image Sensor
- 15fps@4K(3840×2160),25/30fps@3Mp(2304×1296)
- H.265 and H.264 Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (4mm optional)
- IR Range of 40 Mtrs, IP67,SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

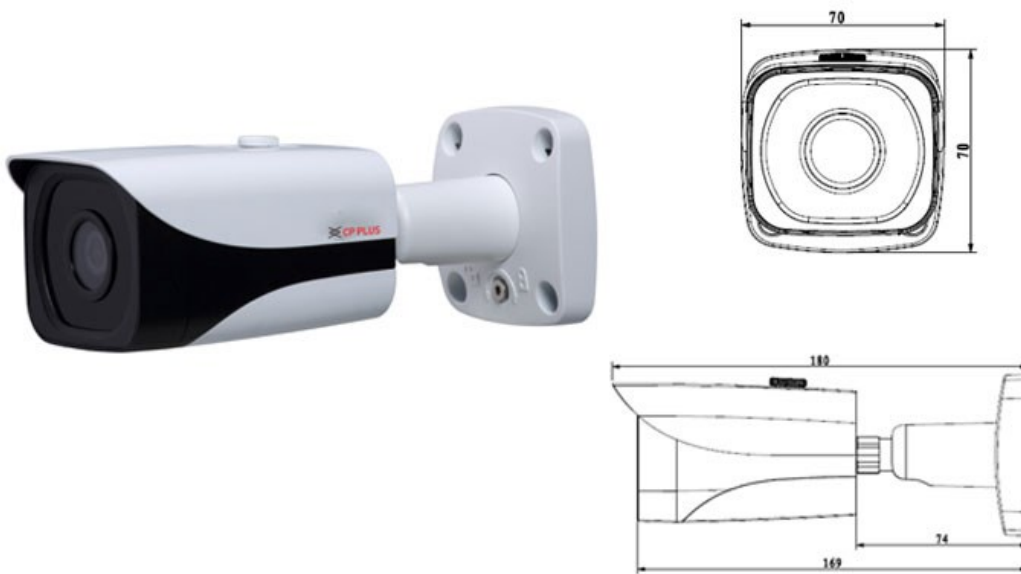

CP- UNC-TD4K081L4E-MD

4K Full HD WDR IR Network Bullet Camera - 40Mtr.



Feature

Image Sensor

Effective Pixels

Minimum Illumination

Shutter Speed

White Balance

Lens

Gain Control (AGC)

Video Compression

Angle of View

Back Light Compensation

S/N Ratio

Video Streaming

Resolution

Digital Zoom

Motion detection

Privacy Mask

ICR

ROI

Bit Rate

Protocol

Smart Detection

Ethernet

User Account

IR

Smart Phone

Micro SD

Operating Temperature

Power Source

Specification

1/2.5" 8MP progressive scan CMOS

3840(H)x2160(V)

0.06Lux/F1.6(Color,1/3s,30IRE) 0.3Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on)

Auto/Manual, 1/3~1/100000s

Auto/Natural/Street Lamp/Outdoor/Manual

2.8mm (4.0mm optional)

Auto/Manual

H.265+/H.265/H.264+/H.264

H:112° (88°), V:69° (48°)

BLC / HLC / WDR(120dB)

More than 50dB

Main Stream: 4K(1~15fps)/3M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 1080P(1~25/30fps)

4K(3840x2160)/ 6M(3072x2048)/5M(3072x1728)/ 5M(2592x1944)/ 4M(2688x1520)/ 3M(2048x1536)/ 3M(2304x1296)/ 1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/ D1(704x576/704x480)

16x

Off / On (4 Zone, Rectangle)

Off / On (4 Area, Rectangle)

Auto (ICR)/Color/B/W

Off / On (4 Zone)

H.264: 24K ~ 10240Kbps, H.265: 14K ~ 9984Kbps

HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP;FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP;IGMP; SNMP, ONVIF, PSIA, CGI

Tripwire, Intrusion, Object Abandoned/Missing, Face Detection

RJ-45 (10/100Base-T)

20 Users

IR Range of 40 Mtr.

iPhone, iPad, Android

Micro SD card 128GB

-30° C ~ +60° C, Less than 95% RH

DC12V, ePoE



 **CP- UNC-TD4K081L4E-MD****4K Full HD WDR IR Network Bullet Camera - 40Mtr.****Feature**

Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

<6.5W
IP67
180mmx70mmx70mm
0.41kg