


CP- UNP-H4081L45-DAP**8MP WDR 40x IR Network PTZ Camera- 450 Mtr.****Main Features**

- 1/1.8" 8MP PS CMOS Image sensor
- Max. 25/30fps@4K
- Powerful 40x Optical zoom and 16x Digital zoom
- WDR(120dB), 2D/3D-DNR, Day/Night(ICR), EIS, Defog, ROI, AGC, AWB, BLC, HLC
- Support Smart wiper
- Up to 300 presets, Auto scan, 8 Tour, 5 Pattern, Auto pan
- Support Starlight Function
- IR Range of 450 Mtr.
- Max 240° /s pan speed, 360° endless pan rotation
- Built-in 7/2 alarm in/out, IP67,SD Card, Hi-PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

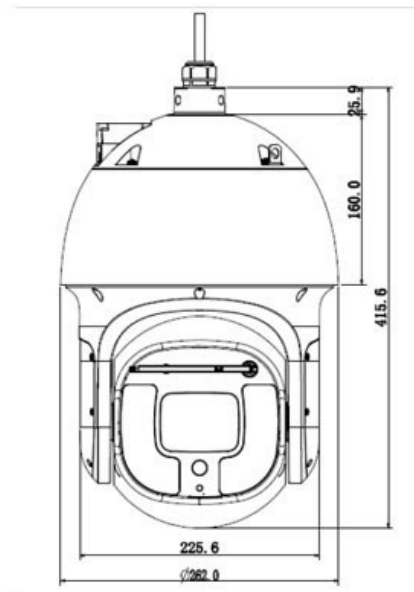

CP- UNP-H4081L45-DAP

8MP WDR 40x IR Network PTZ Camera- 450 Mtr.



Feature

Image Sensor
 Effective Pixels
 Video Output
 S/N Ratio
 Minimum Illumination
 Focal Length
 White Balance
 Focus Control
 Close Focus Distance
 Angle of View
 Electronic Shutter
 AGC control
 Back Light Compensation
 Optical Zoom
 Digital Zoom
 Pan Travel
 Tilt Travel
 Manual Speed
 Presets
 Preset Speed
 Special Features
 Privacy Masking
 Power up Action
 Idle Motion
 Day/Night: IR Cut Filter
 Video Compression
 Video Streaming
 Audio Compression
 Motion Detection
 ROI
 Audio Streaming

Specification

1/1.8" PS CMOS
 3840(H) x 2160(V), 8 Megapixels
 1 port(BNC, 1.0V[p-p], 75Ω)
 More than 56dB
 Color: 0.002Lux@F1.4; B/W: 0.0002Lux@F1.4; 0Lux@F1.4 (IR on)
 5.6mm~223mm
 Auto,ATW,Indoor,Outdoor,Manual
 Auto / Manual
 100mm~ 1000mm
 H: 63.9° ~ 2.0°
 1/1s~1/30,000s
 Auto / Manual
 BLC / HLC / WDR(120dB)
 40x
 16x
 0°~360° endless, Pan Speed: 0.1° ~240° /s
 -30° ~ 90°,auto flip 180°, Tilt Speed: 0.1° ~100°/sec
 Pan: 0.1° ~240° /s; Tilt: 0.1° ~100° /s
 300
 Pan: 240° /s; Tilt: 120° /s
 IR Range upto 450mtr, Optical Defog, EIS, Up to 300 Presets, 5 Pattern, 8 Tour, Auto Pan ,
 Up to 24 areas
 Auto restore to previous PTZ and lens status after power failure
 Activate Preset/ Scan/ Tour/ Pattern if there is no command in the specified period
 Auto(ICR) / Color / B/W
 H.265+/H.265/H.264+/H.264
 Main stream: 4K(1~25/30fps), 1080P/1.3MP/720P (1~25/30fps), Sub stream1: D1/CIF(1 ~ 25/30fps), Sub stream2: 1080P/1.3M/720P (1 ~ 25/30fps)
 G.711a/G.711mu/PCM/G.726/AAC/G722.1/G.729/MPEG2-Layer2
 Supports
 Supports
 1/1 channel In/Out



CP- UNP-H4081L45-DAP**8MP WDR 40x IR Network PTZ Camera- 450 Mtr.****Feature**

Auto Tracking

Networking

IVS

Protocols

Alarm

Tracking Trigger Event

Max Remote Users

Operating Temperature

Smart Phone

Memory Slot

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

Supports

RJ-45 (10Base-T/100Base-TX) , 1 RS485

Tripwire, Intrusion, Abandoned/Missing, Face Detection, Heat Map

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF Profile S&G, API

7/2 channel In/Out

Motion detection, Video tampering , Scene changing, Network disconnection, IP address conflict, Illegal Access, Storage anomaly

20 users

-40°C ~ 70°C / Less than 95% RH

iPhone, iPad, Android Phone

Micro SD card 256GB

IP67

Φ262(mm) x 415.6 (mm)

8.5kg

AC24V/3A(±25%), Hi-PoE

26W, 38W (IR on, Heater on)