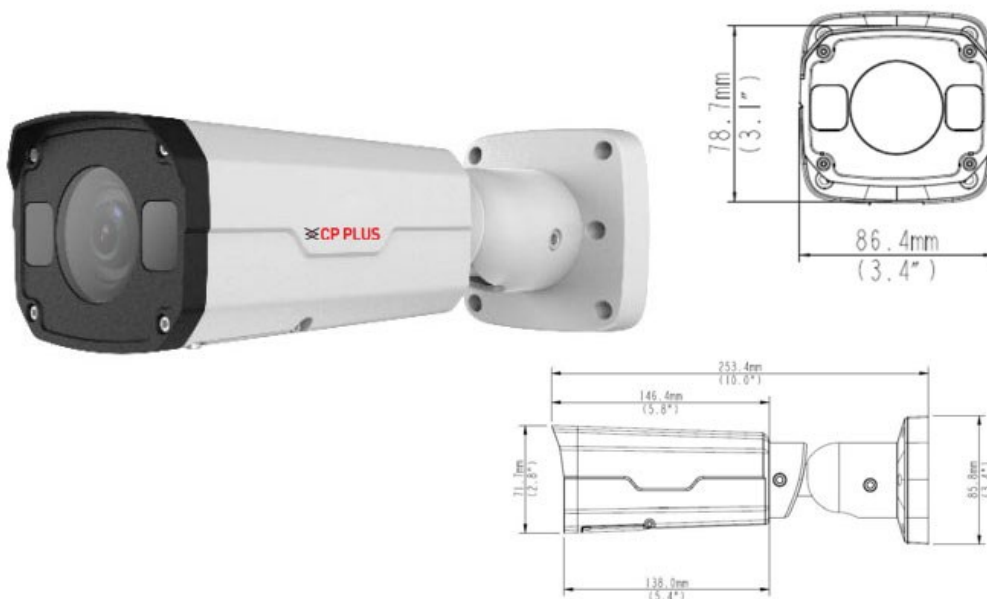


CP- VNC-T4KZR5-VMD-V2**8MP WDR Array Network Bullet Camera - 50Mtr.****Main Features**

- 1/2" 8MP PS CMOS Image Sensor
- Max. 20fps@8MP (3840 x 2160) , Max.30fps@5MP(2592 x 1944)
- Ultra 265,H.265, H.264,MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, Digital Defog, 2D/3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized Lens
- IR Range of 50 Mtrs, Smart IR, Micro SD Card, IP67, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream****CE FC** **RoHS**
COMPLIANT

CP- VNC-T4KZR5-VMD-V2

8MP WDR Array Network Bullet Camera - 50Mtr.

Feature	Specification
Image Sensor	1/2" 8MP Progressive scan CMOS
Minimum Illumination	Colour: 0.001Lux (F1.5, AGC ON) 0Lux with IR on
Shutter Speed	Auto/Manual, 1 ~ 1/100000s
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
Lens	2.8~12mm Motorized Lens
Gain Control (AGC)	Auto/Manual
Video Compression	Ultra 265,H.265, H.264,MJPEG
Angle of View	114.8° ~47.3°(H) 75.3° ~ 20.4°(V) 141.2° ~ 55.8°(O)
S/N Ratio	>52dB
Back Light Compensation	BLC/ HLC/ WDR(120dB)
Video Streaming	Triple
Video Output	1 BNC, impedance 75Ω; amplitude 1V [p-p]
Frame Rate	Main Stream: 8MP (3840x2160), Max 20fps; 5MP (2592x1944), Max 30fps; 5MP (2944x1656), Max 30fps; 4MP (2560x1440), Max 30fps; 2MP (1920x1080), Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
Motion detection	Up to 4 areas
Privacy Mask	Up to 8 areas
ICR	IR-cut filter with auto switch (ICR)
ROI	Up to 8areas
Audio	Two-way audio Supported
Audio Compression	G.711
Audio Input	impedance 35 kΩ; amplitude 2 V [p-p]
Audio Output	impedance 600 Ω; amplitude 2 V [p-p]
Alarm IN	1 IN
Alarm Out	1 Out
Bit Rate	128 Kbps~16 Mbps
Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API
Smart Detection	Intrusion, cross line, motion detection, Face detection, Audio detection, Defocus, Scene Change, Object Left, Object Moving, People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication

CP- VNC-T4KZR5-VMD-V2

8MP WDR Array Network Bullet Camera - 50Mtr.

Feature

Ethernet

Wavelength

IR

OSD

Smart Phone

Micro SD

ANR Technology

Special Features

Flip

Operating Temperature

Humidity

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification

1 RJ45 10M/100M Base-TX Ethernet

850nm

IR Range of 50 Mtr., Smart IR

Up to 8 OSDs

Android, iOS

Micro SD, up to 256GB

Support

Digital De-Fog, Dewarping

Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise

-35°C ~ +60°C (-31°F ~ 140°F)

≤95% RH (non-condensing)

12 V DC±25%, PoE (IEEE802.3 af)

Max 10W

IP67

Front cover: Metal, Body: Metal, Bracket: Metal, Bottom plate: Metal

253.4 × 86.4 × 78.7mm (57.6" × 3.4" × 2.8")

1.0kg